




Local vs. Global Illumination & Radiosity

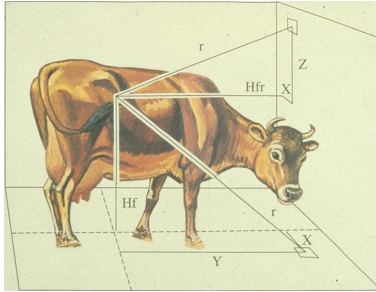

An early application of radiative heat transfer in stables.


Last Time?

- Ray Casting & Ray-Object Intersection
- Recursive Ray Tracing
- Distributed Ray Tracing

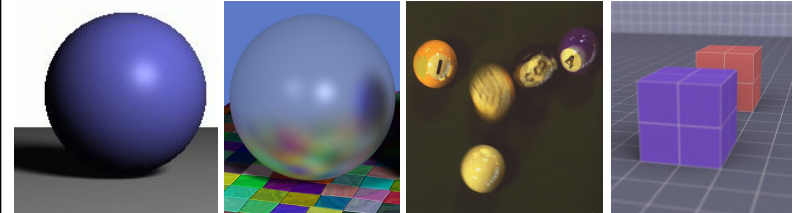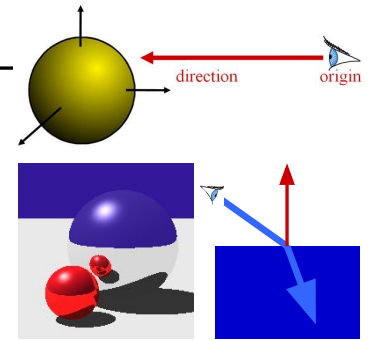


Reading for Today

- "An improved illumination model for shaded display"
Turner Whitted, 1980.

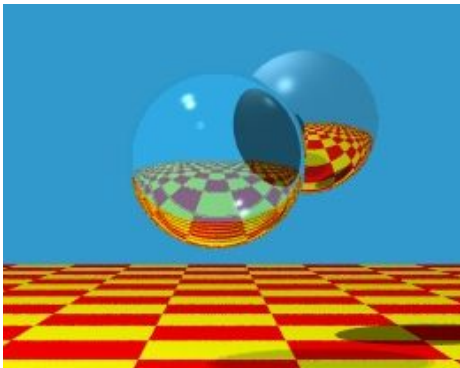

Other Reading for Today




- "Distributed Ray Tracing", Cook, Porter, & Carpenter, SIGGRAPH 1984.

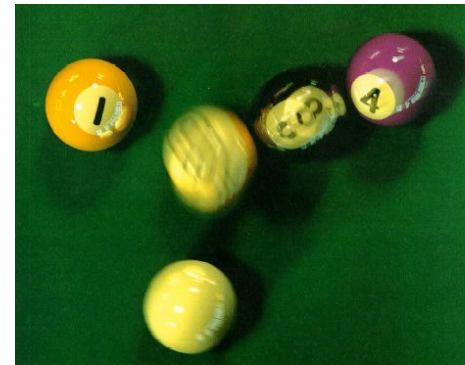

Shadows

- one shadow ray per intersection per point light source

point light source

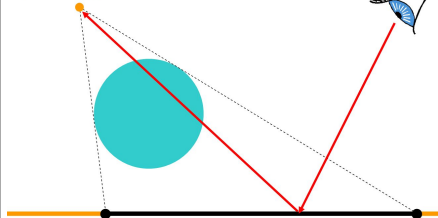


Shadows & Light Sources



http://3media.initialized.org/photos/2000-10-18/index_gall.htm



<http://www.davidfay.com/index.php>



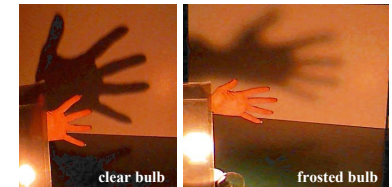


<http://www.pa.uky.edu/~sciworks/light/preview/bulb2.htm>

Soft Shadows


- multiple shadow rays to sample area light source

area light source

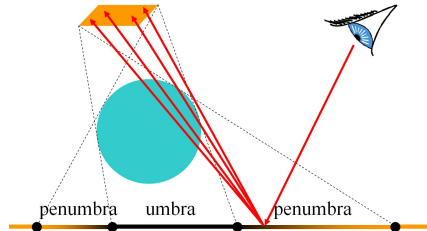


Antialiasing – Supersampling


- multiple rays per pixel





point light



w/ antialiasing




area light




Reflection

- one reflection ray per intersection

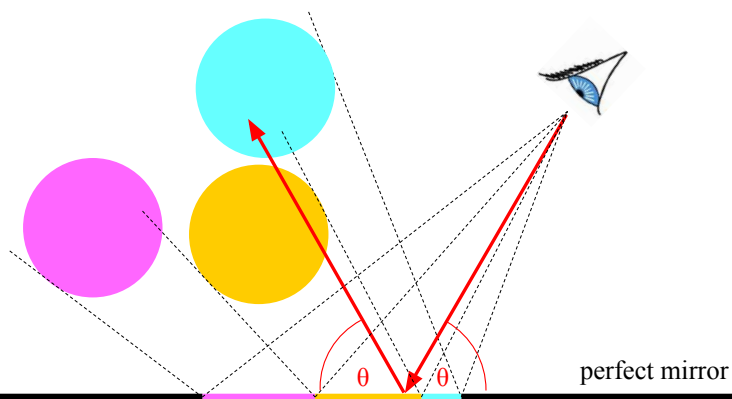


Glossy Reflection

- multiple reflection rays

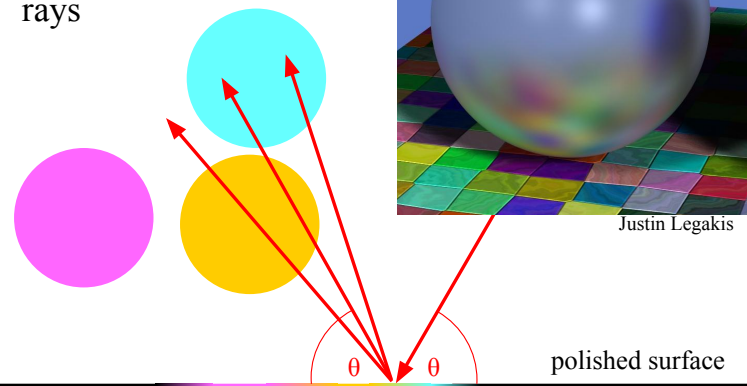



Motion Blur

- Sample objects temporally

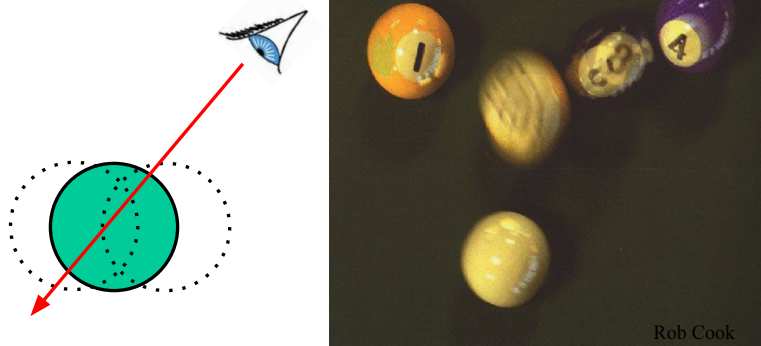

Depth of Field

- multiple rays per pixel

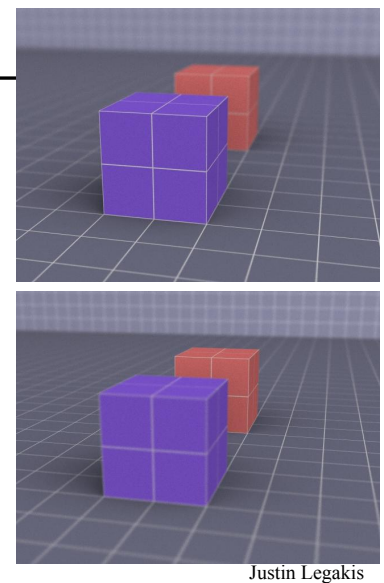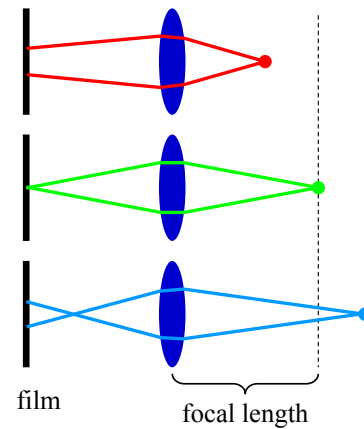


Ray Tracing Algorithm Analysis

- Ray casting
- Lots of primitives
- Recursive
- Distributed Ray Tracing Effects
 - Soft shadows
 - Anti-aliasing
 - Glossy reflection
 - Motion blur
 - Depth of field

cost \approx height * width *
 num primitives *
 intersection cost *
 size of recursive ray tree *
 num shadow rays *
 num supersamples *
 num glossy rays *
 num temporal samples *
 num focal samples *
 ...
can we reduce this?
 these can serve double duty

HW3: Raytracing & Epsilon

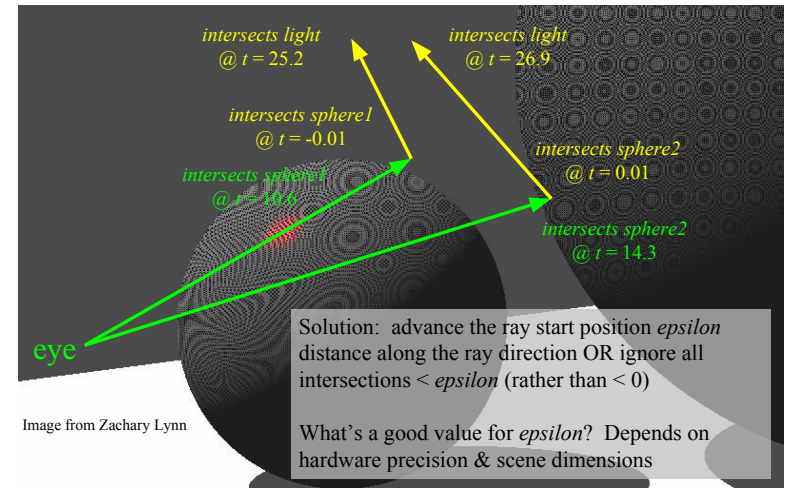


Today

- **Local Illumination**
 - BRDF
 - Ideal Diffuse Reflectance
 - Ideal Specular Reflectance
 - The Phong Model
- Why is Global Illumination Important?
- Radiosity Matrix
- Calculating the Form Factors
- Advanced Radiosity


BRDF

- Ratio of light coming from one direction that gets reflected in another direction
- Bidirectional Reflectance Distribution Function
 - 4D
 - $R(\theta_i, \phi_i; \theta_o, \phi_o)$
 - Note: BRDF for isotropic materials is 3D

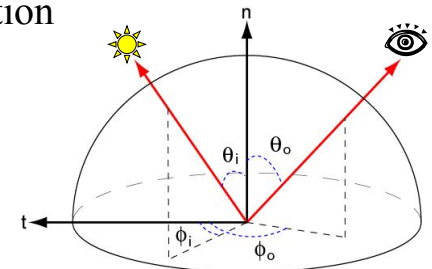



Incoming Radiance

- The amount of light received by a surface depends on incoming angle
 - Bigger at normal incidence (Winter/Summer difference)
- By how much?
 - $dB = dA \cos \theta$
 - Same as: $\mathbf{l} \cdot \mathbf{n}$ (dot product with normal)

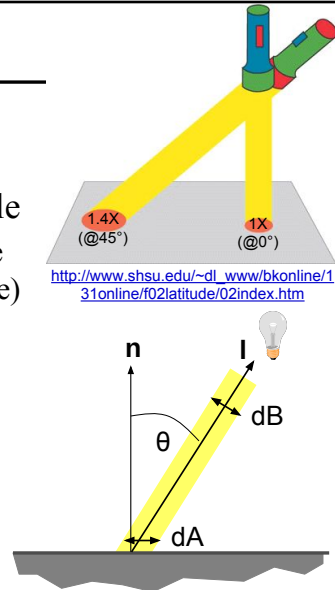


Ideal Diffuse Reflectance

- Assume surface reflects equally in all directions (a.k.a. Lambertian)
- An ideal diffuse surface is, at the microscopic level, a very rough surface
- Examples: chalk, clay, some paints

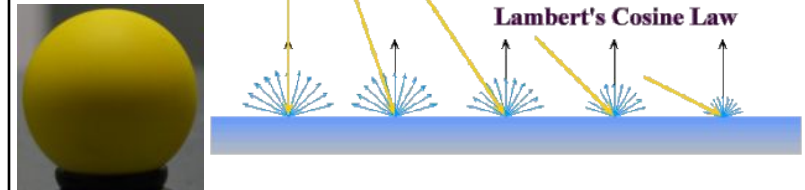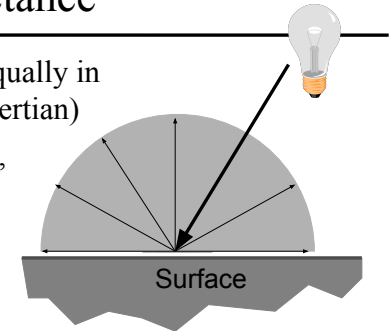

Ideal Specular Reflectance

- Assume surface reflects only in mirror direction
 - View dependent
- Microscopic surface elements are oriented in the same direction as the surface
- Examples: mirrors, highly polished metals

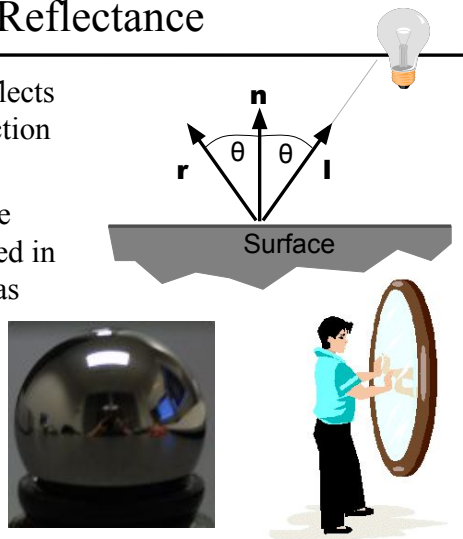


Non-Ideal Reflectors

- Real materials tend to be *neither* ideal diffuse *nor* ideal reflective
- Highlight is blurry, looks glossy




Non-Ideal Reflectors

- Most light reflects in the ideal reflected direction
- Microscopic surface variations will reflect light just slightly offset
- How much light is reflected?

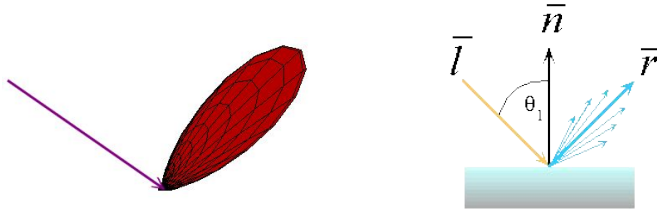


The Phong Model

- An empirical (observational) model
- How much light is reflected “specularly”?
 - Depends on the angle α , between the ideal reflection direction r and the viewer direction l

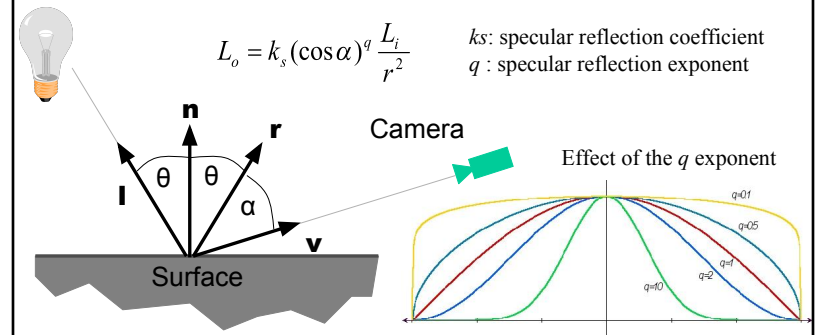

The Phong Model

- Sum of three components:
diffuse reflection + specular reflection + “ambient”.

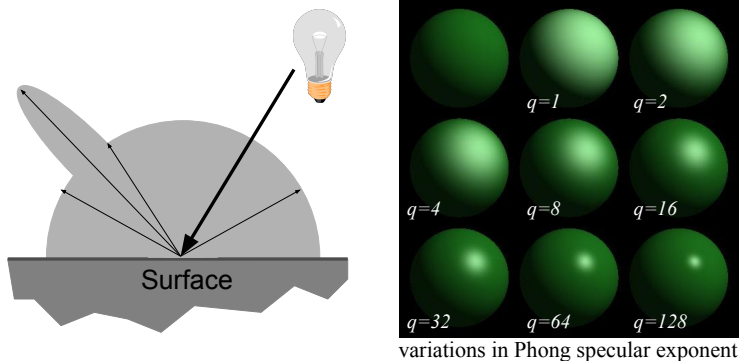


Ambient Illumination

- In a typical room, everything receives at least a little bit of light
- Ambient illumination represents the reflection of all indirect illumination

$$L(\omega_r) = k_a$$

- This is a total hack!

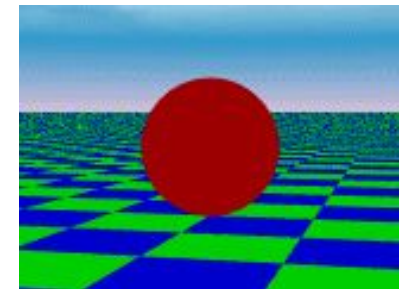

Questions?



Lightscape <http://www.lightscape.com>


Today

- Local Illumination
- **Why is Global Illumination Important?**
 - The Cornell Box
 - Radiosity vs. Ray Tracing
- Radiosity Matrix
- Calculating the Form Factors
- Advanced Radiosity

Why Global Illumination?


- Simulate all light inter-reflections (indirect lighting)
 - in a room, a lot of the light is indirect: it is reflected by walls.
- How have we dealt with this so far?
 - Ambient term to fake some uniform indirect light

ray tracing




(no ambient term)

indirect illumination



it is smooth, but not constant!


“right” answer



Henrik Wann Jensen


Why Radiosity?

- Sculpture by John Ferren
- *Diffuse* panels

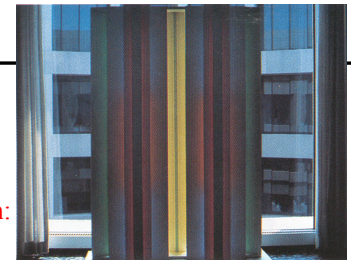

photograph:


diagram from above:

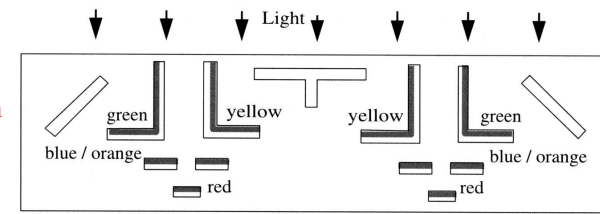


All visible surfaces, white.



Radiosity vs. Ray Tracing



Original sculpture by John Ferren lit by daylight from behind.



Ray traced image. A standard ray tracer cannot simulate the interreflection of light between diffuse surfaces.






Image rendered with radiosity. note color bleeding effects.


Reading for Tuesday



photograph



simulation

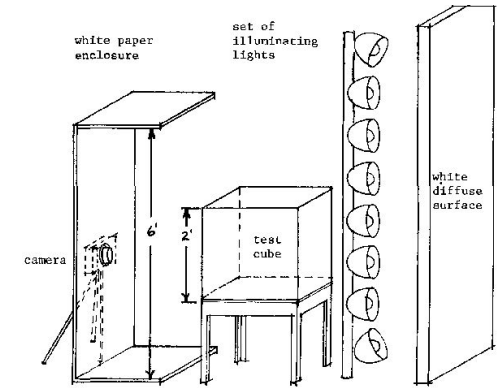

Goral, Torrance, Greenberg & Battaile
Modeling the Interaction of Light Between Diffuse Surfaces
SIGGRAPH '84

The Cornell Box

- Careful calibration and measurement allows for comparison between physical scene & simulation




photograph




simulation

Light Measurement Laboratory
Cornell University, Program for Computer Graphics


Visualizing Inter-reflections...



direct illumination
(0 bounces)



1 bounce



2 bounces


Note: image brightness not constant between images

images by Micheal Callahan

http://www.cs.utah.edu/~shirley/classes/cs684_98/students/callahan/bounce/

Radiosity vs. Ray Tracing

- Ray tracing is an *image-space* algorithm
 - If the camera is moved, we have to start over
- Radiosity is computed in *object-space*
 - View-independent (just don't move the light)
 - Can pre-compute complex lighting to allow interactive walkthroughs

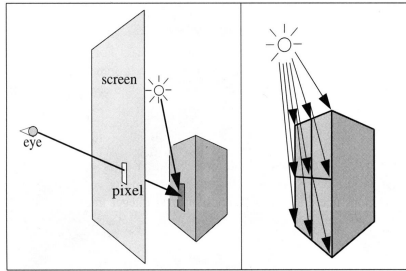


Today

- Local Illumination
- Why is Global Illumination Important?
- **Radiosity Matrix**
- Calculating the Form Factors
- Advanced Radiosity


Radiosity Overview

- Surfaces are assumed to be perfectly Lambertian (diffuse)
 - reflect incident light in all directions with equal intensity
- The scene is divided into a set of small areas, or patches.
- The radiosity, B_i , of patch i is the total rate of energy leaving a surface. The radiosity over a patch is constant.
- Units for radiosity: Watts / steradian * meter²

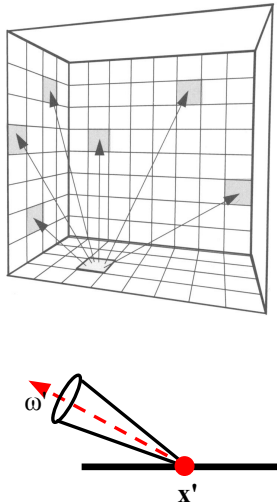

Discrete Radiosity Equation

Discretize the scene into n patches, over which the radiosity is constant

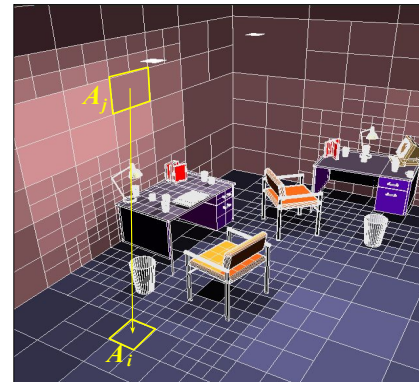

$$B_i = E_i + \rho_i \sum_{j=1}^n F_{ij} B_j$$

light leaving patch i

light emitted from patch i

material reflectivity

form factor

The equation is recursive, but it can be solved iteratively

Radiosity in Matrix Form

$$B_i = E_i + \rho_i \sum_{j=1}^n F_{ij} B_j$$

n simultaneous equations with n unknown B_i values can be written in matrix form:

$$\begin{bmatrix} 1 - \rho_1 F_{11} & -\rho_1 F_{12} & \cdots & -\rho_1 F_{1n} \\ -\rho_2 F_{21} & 1 - \rho_2 F_{22} & & \\ \vdots & & \ddots & \\ -\rho_n F_{n1} & \cdots & \cdots & 1 - \rho_n F_{nn} \end{bmatrix} \begin{bmatrix} B_1 \\ B_2 \\ \vdots \\ B_n \end{bmatrix} = \begin{bmatrix} E_1 \\ E_2 \\ \vdots \\ E_n \end{bmatrix}$$

↓ solve for B_i


A solution yields a single radiosity value B_i for each patch in the environment, a view-independent solution.

Solving the Radiosity Matrix

- Initialize all radiosity values to 0
- Each iteration, update the radiosity of each patch by *gathering* the contribution of radiosities from all other patches:

$$\begin{bmatrix} B_1 \\ B_2 \\ \vdots \\ B_i \\ \vdots \\ B_n \end{bmatrix} = \begin{bmatrix} E_1 \\ E_2 \\ \vdots \\ E_i \\ \vdots \\ E_n \end{bmatrix} + \begin{bmatrix} \rho_1 F_{11} & \rho_1 F_{12} & \cdots & \rho_1 F_{1n} \\ \rho_2 F_{21} & \rho_2 F_{22} & \cdots & \rho_2 F_{2n} \\ \vdots & \vdots & \ddots & \vdots \\ \rho_i F_{i1} & \rho_i F_{i2} & \cdots & \rho_i F_{in} \\ \vdots & \vdots & \ddots & \vdots \\ \rho_n F_{n1} & \rho_n F_{n2} & \cdots & \rho_n F_{nn} \end{bmatrix} \begin{bmatrix} B_1 \\ B_2 \\ \vdots \\ B_i \\ \vdots \\ B_n \end{bmatrix}$$


↑ Radiosity values on iteration $t+1$
↑ Radiosity values on iteration t

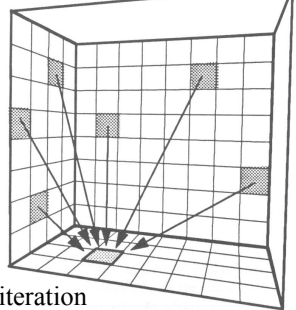

- Radiosity values only increase on each iteration
- This method is fundamentally a Gauss-Seidel relaxation


Interpolating Vertex Radiosities

- B_i radiosity values are constant over the extent of a patch.
- How are they mapped to the vertex radiosities (intensities) needed by the renderer?
 - Average the radiosities of patches that contribute to the vertex
 - Vertices on the edge of a surface are assigned values extrapolation

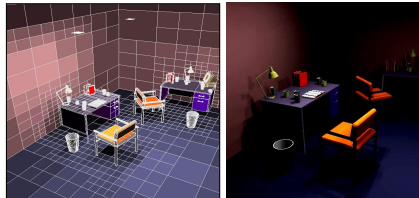

$$B = \frac{1}{4}(B_1 + B_2 + B_3 + B_4)$$

or
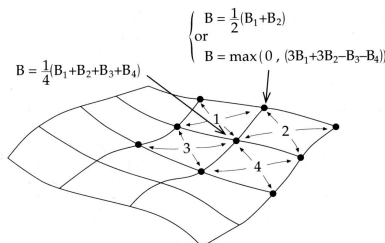
$$B = \max(0, (3B_1 + 3B_2 - B_3 - B_4))$$


Questions?




Factory simulation. Program of Computer Graphics, Cornell University.
30,000 patches.

Today

- Local Illumination
- Why is Global Illumination Important?
- Radiosity Equation/Matrix
- **Calculating the Form Factors**
- Advanced Radiosity


Calculating the Form Factor F_{ij}

- F_{ij} = fraction of light energy leaving patch j that arrives at patch i
- Takes account of both:
 - geometry (size, orientation & position)
 - visibility (are there any occluders?)

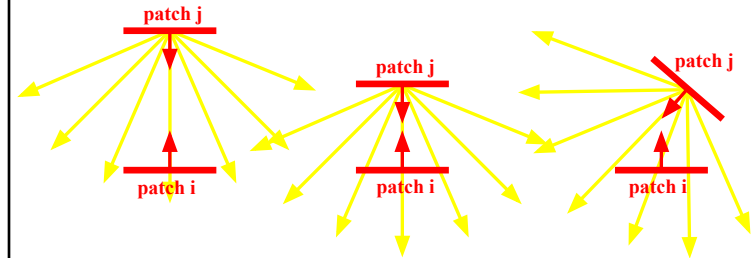

Calculating the Form Factor F_{ij}


- F_{ij} = fraction of light energy leaving patch j that arrives at patch i



$$F_{ij} = \frac{1}{A_i} \int_{A_i} \int_{A_j} \frac{\cos \theta_i \cos \theta_j}{\pi r^2} V_{ij} dA_j dA_i$$


Form Factor Determination

The Nusselt analog: the form factor of a patch is equivalent to the fraction of the unit circle that is formed by taking the projection of the patch onto the hemisphere surface and projecting it down onto the circle.

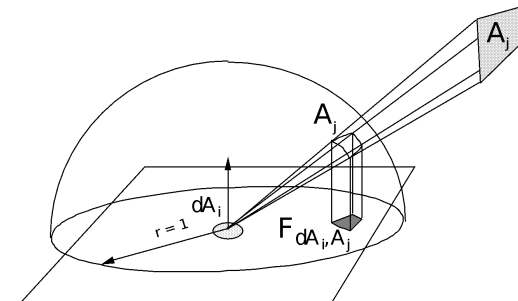


Hemicube Algorithm

- A hemicube is constructed around the center of each patch
- Faces of the hemicube are divided into "pixels"
- Each patch is projected (rasterized) onto the faces of the hemicube
- Each pixel stores its pre-computed form factor
The form factor for a particular patch is just the sum of the pixels it overlaps
- Patch occlusions are handled similar to z-buffer rasterization

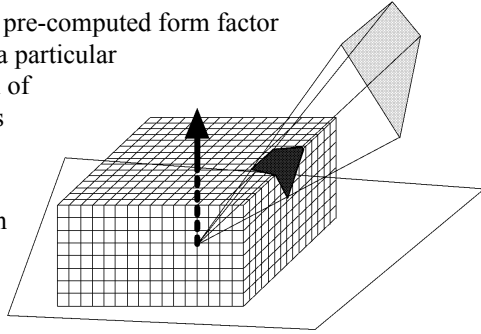

Form Factor from Ray Casting

- Cast n rays between the two patches
 - Compute visibility (what fraction of rays do not hit an occluder)
 - Integrate the point-to-point form factor
- Permits the computation of the patch-to-patch form factor, as opposed to point-to-patch

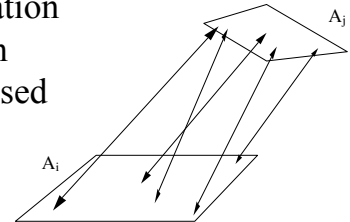

Questions?




Lightscape <http://www.lightscape.com>

Today


- Local Illumination
- Why is Global Illumination Important?
- Radiosity Equation/Matrix
- Calculating the Form Factors
- **Advanced Radiosity**
 - **Progressive Radiosity**
 - Adaptive Subdivision
 - Discontinuity Meshing
 - Hierarchical Radiosity

Stages in a Radiosity Solution

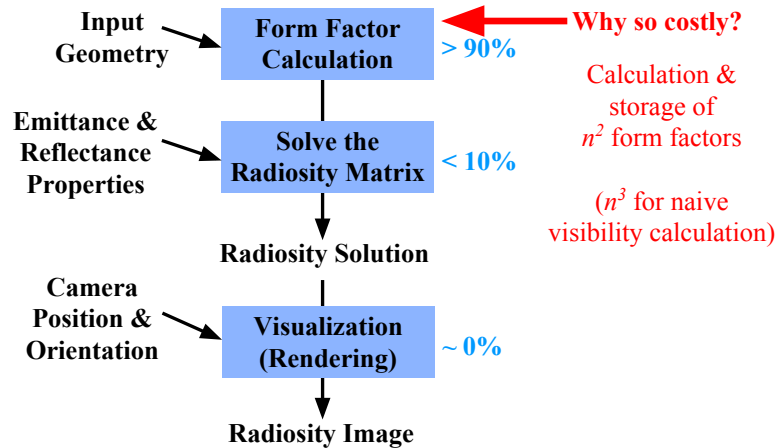

Progressive Refinement

- Goal: Provide frequent and timely updates to the user during computation
- Key Idea: Update the entire image at every iteration, rather than a single patch
- How? Instead of summing the light received by one patch, distribute the radiance of the patch with the most *undistributed radiance*.

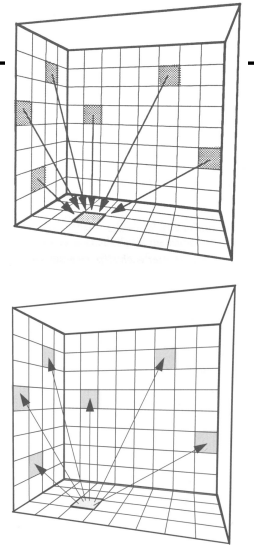


Reordering the Solution for PR

Shooting: the radiosity of all patches is updated for each iteration:


$$\begin{bmatrix} B_1 \\ B_2 \\ \vdots \\ B_n \end{bmatrix} = \begin{bmatrix} B_1 \\ B_2 \\ \vdots \\ B_n \end{bmatrix} + \begin{bmatrix} \dots & \rho_1 F_{1i} & \dots \\ \dots & \rho_2 F_{2i} & \dots \\ \vdots & \vdots & \vdots \\ \dots & \rho_n F_{ni} & \dots \end{bmatrix} \begin{bmatrix} \vdots \\ B_i \\ \vdots \end{bmatrix}$$

This method is fundamentally a Southwell relaxation

Progressive Refinement w/out Ambient Term

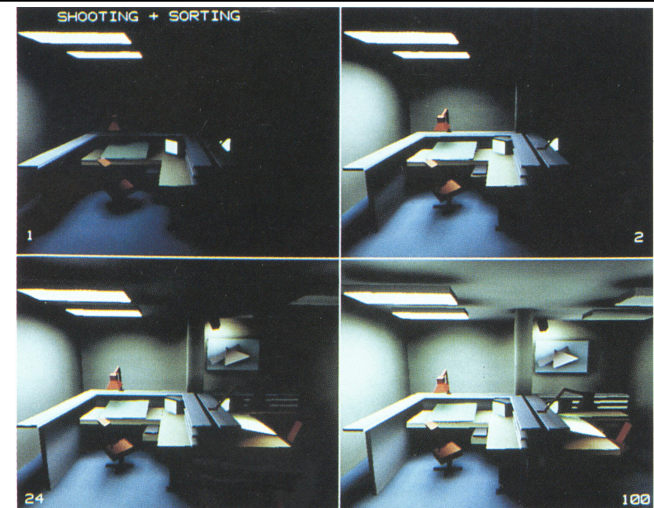

Progressive Refinement with Ambient Term

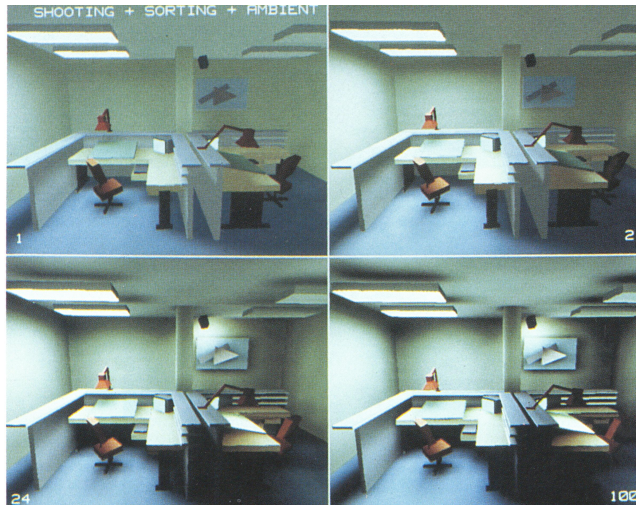

Questions?




Lightscape <http://www.lightscape.com>


Reading for Friday:



photograph



simulation

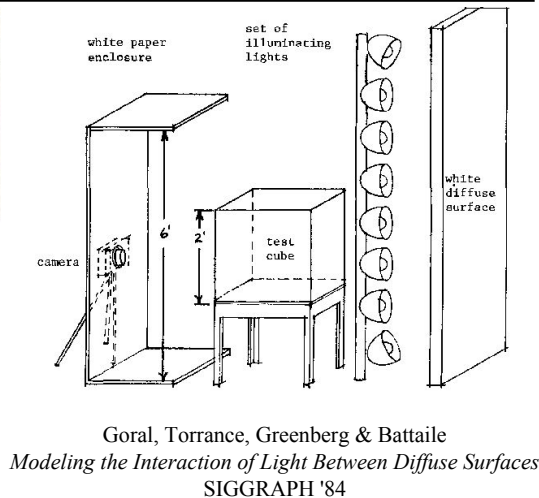


Today

- Local Illumination
- Why is Global Illumination Important?
- Radiosity Equation/Matrix
- Calculating the Form Factors
- Advanced Radiosity
 - Progressive Radiosity
 - Adaptive Subdivision
 - Discontinuity Meshing
 - Hierarchical Radiosity


Increasing the Accuracy of the Solution

What's wrong with this picture?

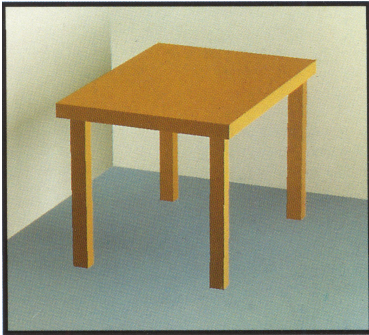


- Image quality is a function of patch size
- Compute a solution on a uniform initial mesh, then refine the mesh in areas that exceed some error tolerance:
 - shadow boundaries
 - other areas with a high radiosity gradient


Adaptive Subdivision of Patches



Coarse patch solution
(145 patches)



Improved solution
(1021 subpatches)




Adaptive subdivision
(1306 subpatches)


Discontinuity Meshing

- Limits of umbra and penumbra

- Captures nice shadow boundaries
- Complex geometric computation to construct mesh

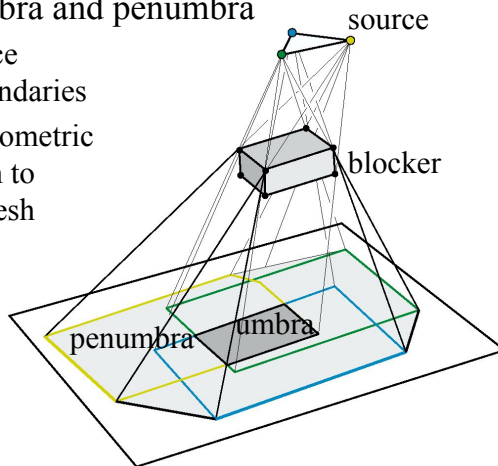


Optional Reading for Friday:

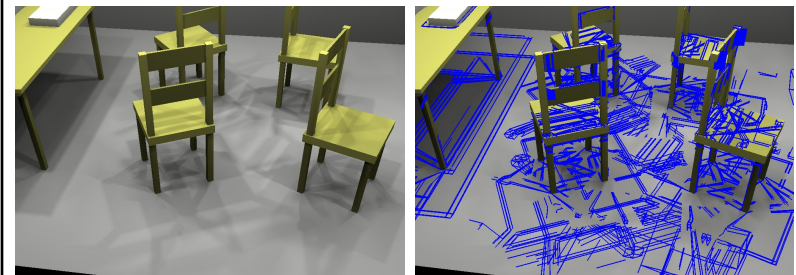

“Fast and Accurate Hierarchical
Radiosity Using Global Visibility”
Durand, Drettakis, & Puech 1999


Hierarchical Radiosity

- Group elements when the light exchange is not important
 - Breaks the quadratic complexity
 - Control non trivial, memory cost

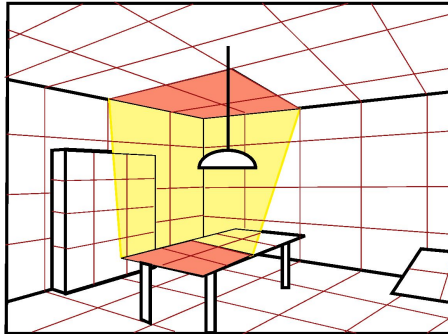

Practical Problems with Radiosity

- Meshing
 - memory
 - robustness
- Form factors
 - computation
- Diffuse limitation
 - extension to specular takes too much memory

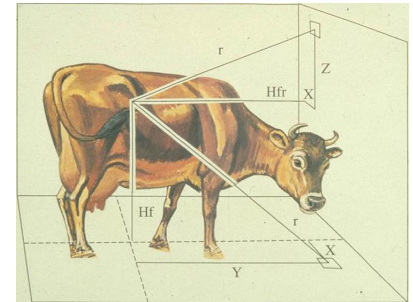

Cow-cow form factor?

Questions?



Rendered using the Lightscape Visualization System.
Courtesy of and copyright (c) 1996 Design Visualization Partners (Santa Monica, CA).

Lightscape <http://www.lightscape.com>