

## Sample Unix Session

## A simple Unix session

- Log in
- create C program “reverse.c”
- compile program
- test the program (run it).
- send Dave email
- log out

## Remote Access


- Sample session is using ttssh (A windows ssh client).
- Could be anything (a window on a RCS workstation, telnet, etc).

## Logging in





## Sending email and logging out

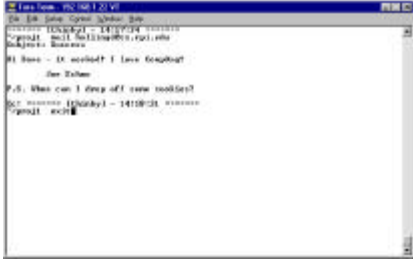

```
Linux: ~#. 2011-12-11 11:21:01
[~]# cat /dev/null > /dev/null
[~]# echo "Hi there - I'm working on Java GroupMail" | mail -s "Hi there" root@linux
P.S. What can I help off your today?
[~]# exit
```