

Motivation, Terminology, Layered systems (and other random stuff)

History and Motivation

- Early computers were highly centralized.
 - Single point of failure
 - User has to “go to” the computer.
- Proliferation of low cost computers made it possible to get past these 2 primary disadvantages (with a network).

Motivation

- Sharing of resources is more efficient
- Price/Performance
- Use each piece of equipment for what it is best at
- Centralize administration
- Computers as communication tools

Computer Networks are now everywhere

- PCs <-> Mainframes
- Automated Tellers
- Embedded Systems
- Communications Systems
- The Internet

Networked Computers - Traditional Uses

- Communications (email)
- File exchange, disk sharing
- Sharing peripherals (printers, tape drives)
- Remote execution

New(er) Uses for Networked Computers

- Information Sharing
- Entertainment, distributed games
- Commerce
- Automation of business processes
- Collaborative computing
- Homework Submission

Wide variety of types of networks

- circuit switched
 - telephone system
- packet switched:
 - The Internet (TCP/IP)

Network Models

- Using a formal model allows us to deal with various aspects of Networks abstractly.
- We will look at a popular model (OSI reference model).
- The OSI reference model is a *layered* model.


Layering

- Divide a task into pieces and then solve each piece independently (or nearly so).
- Establishing a well defined interface between layers makes porting easier.
- Major Advantages:
 - ◆ Code Reuse
 - ◆ Extensibility

Layering Example: Federal Express

- Letter in envelope, address on outside
- FedX guy adds addressing information, barcode.
- Local office drives to airport and delivers to hub.
- Sent via airplane to nearest city.
- Delivered to right office
- Delivered to right person


FedX Layers

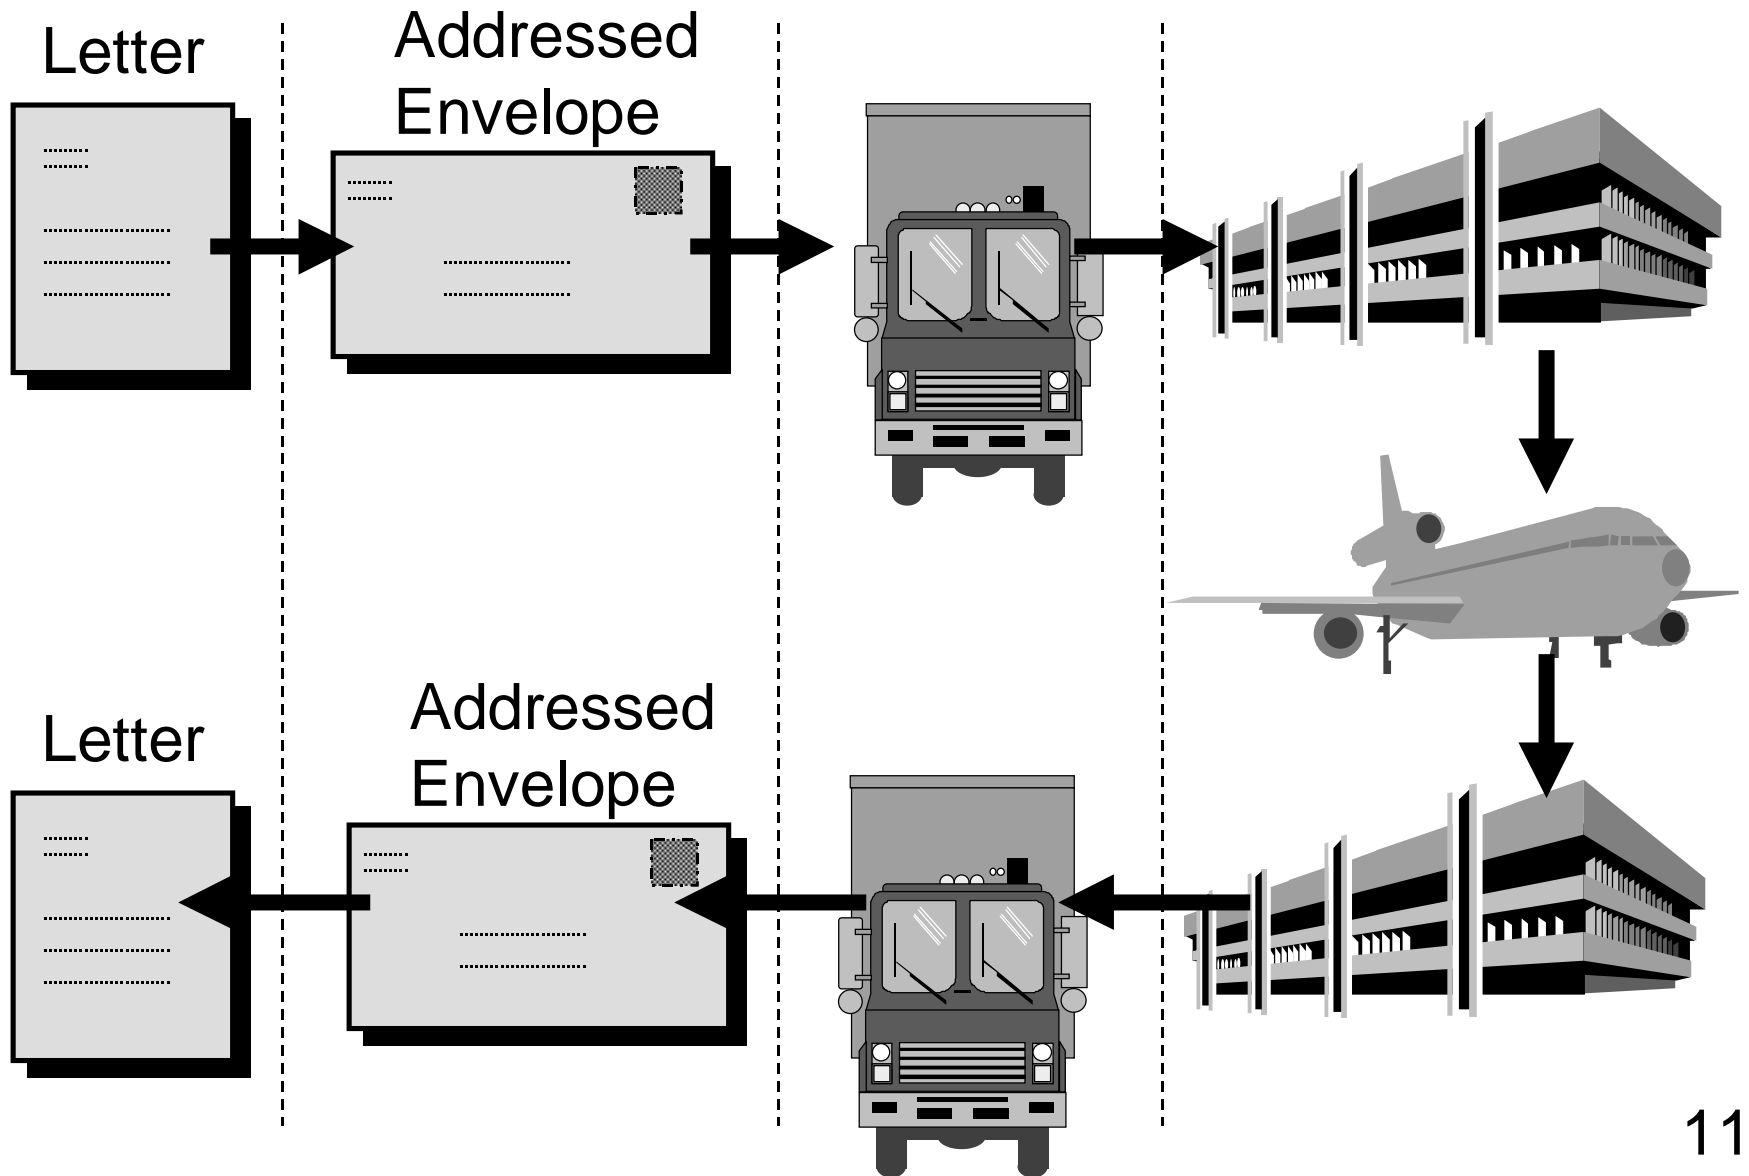

Layered Software Systems

- Network software
- Operating systems
- Windowing systems

Unix is a Layered System

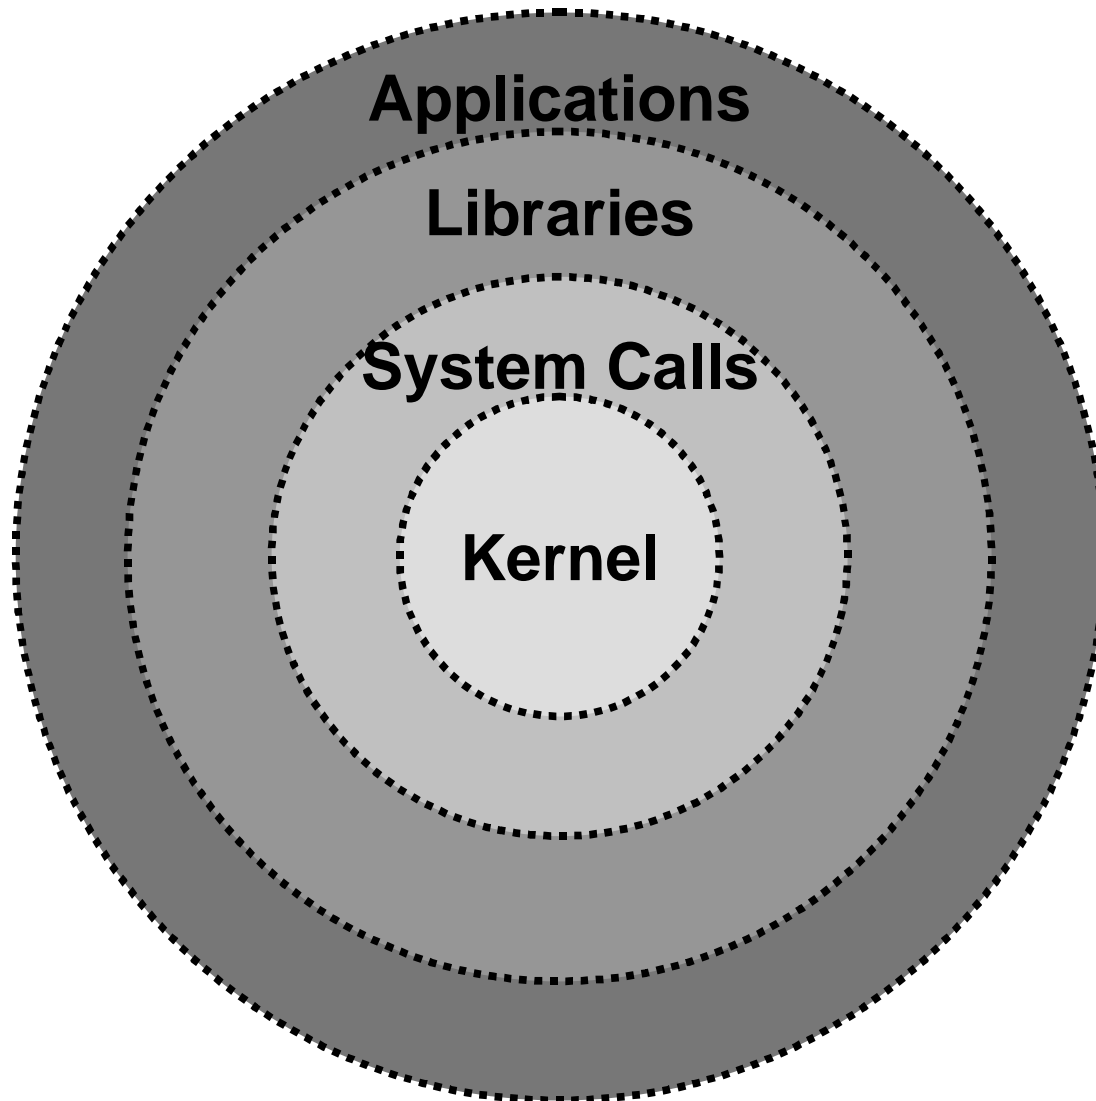

OSI Reference Model

The International Standards Organization (ISO) proposal for the standardization of the various protocols used in computer networks (specifically those networks used to connect open systems) is called the Open Systems Interconnection Reference Model (1984), or simply the OSI model.

OSI Model


Although the OSI model is a just a model (not a specification), it is generally regarded as the most complete model (as well it should be - nearly all of the popular network protocol suites in use today were developed before the OSI model was defined).

OSI <-> Network Software


Although this course is about network programming (and not about networking in general), an understanding of a complete network model is essential.

We will look at the OSI Reference Model in detail.

OSI 7 Layer Model:

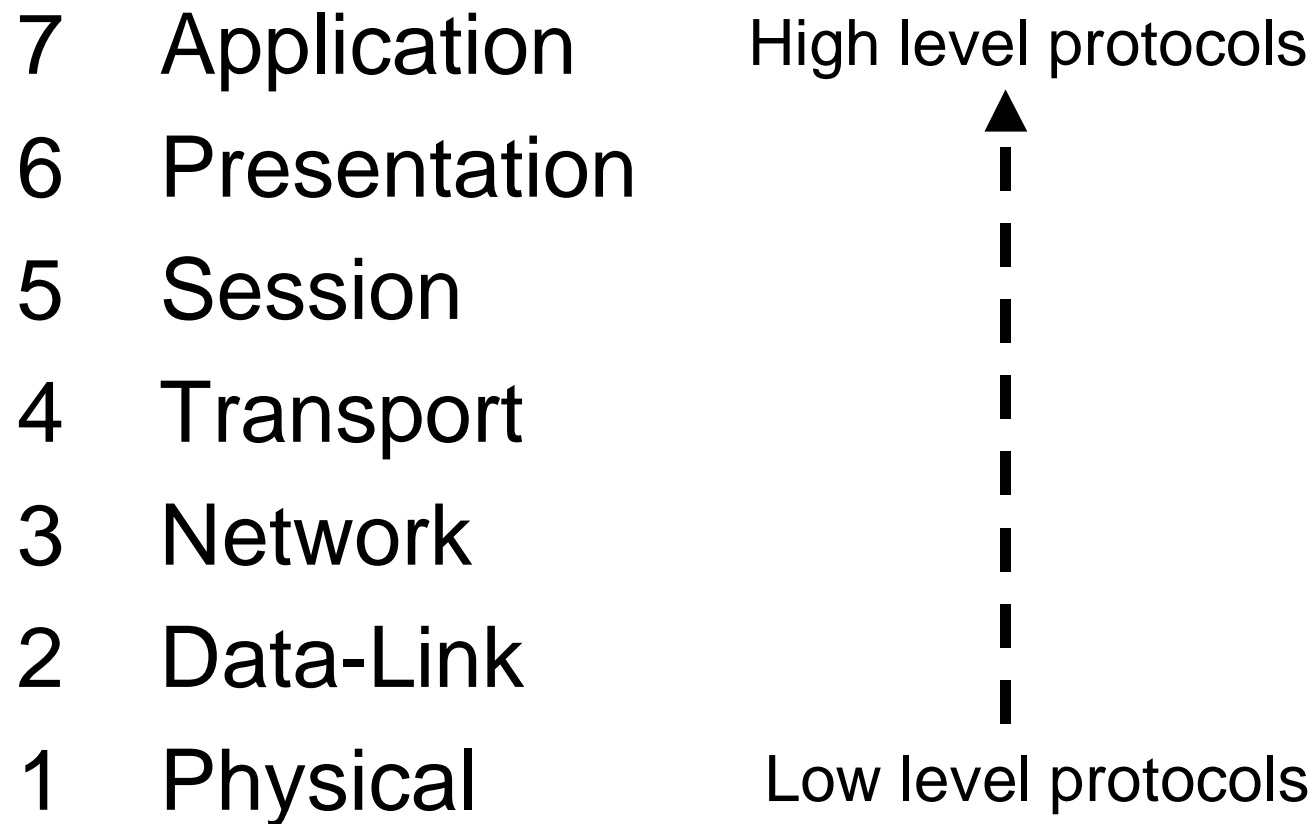


Simplified Network Model

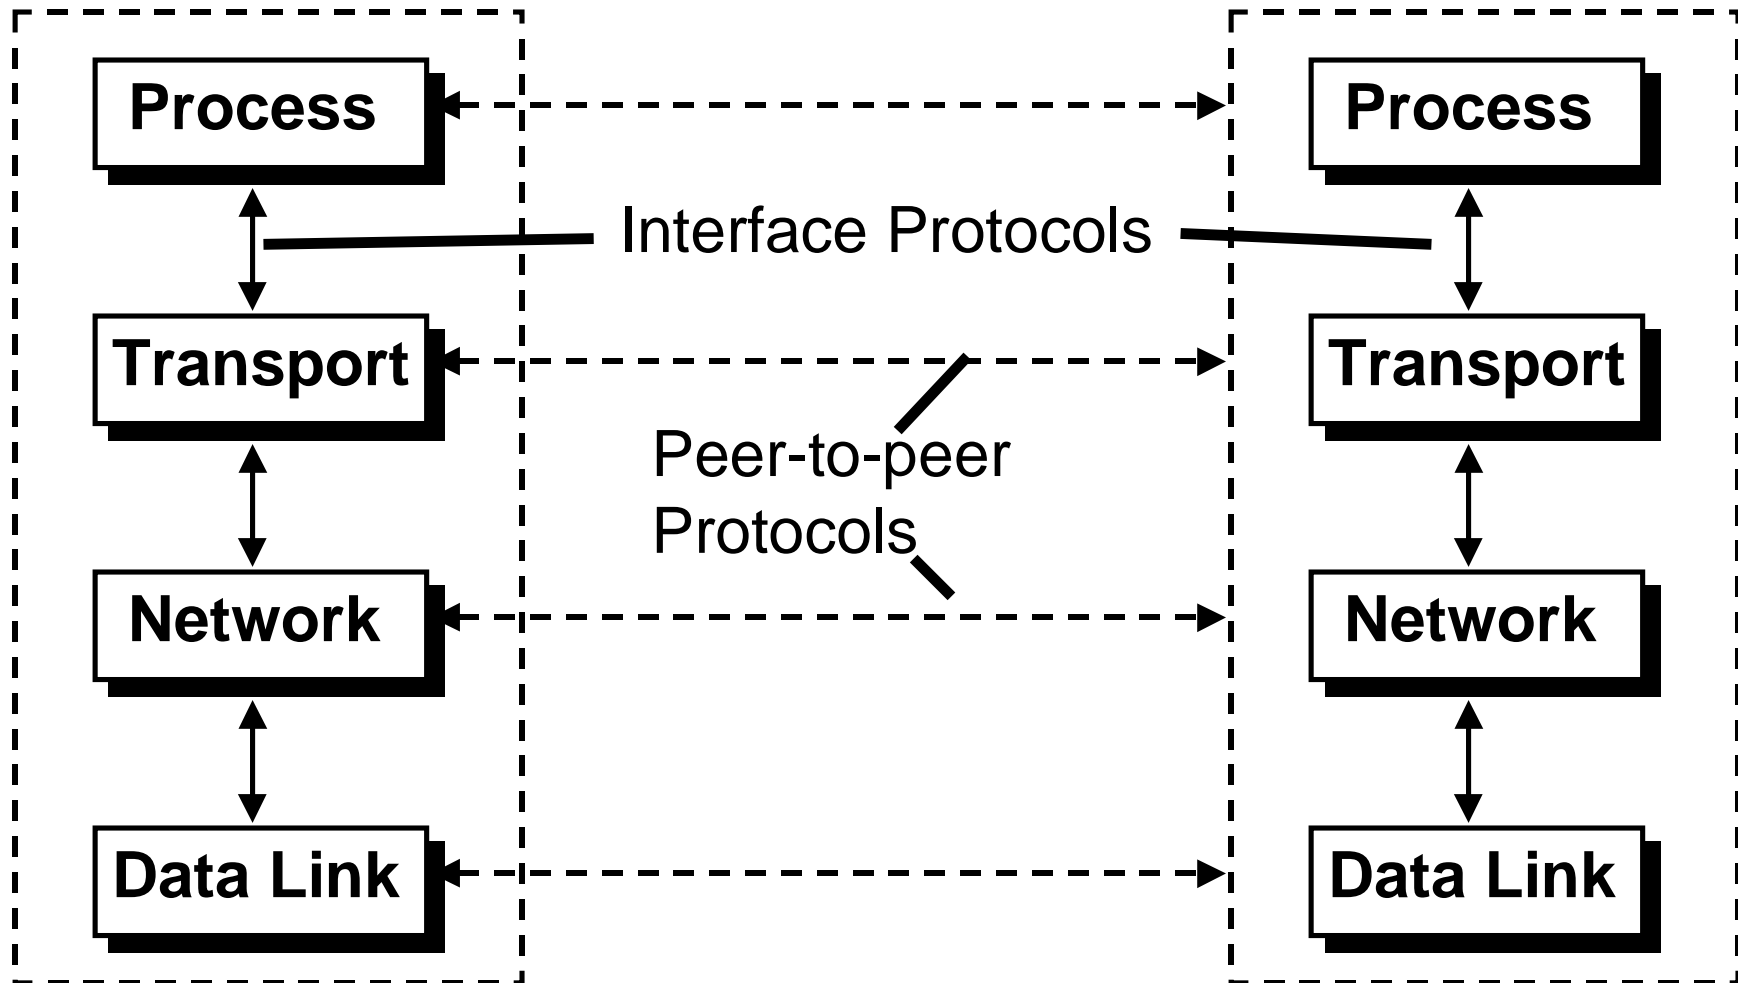

Thought Exercise

- Come up with an example of a layered system.
- Describe the interface and peer-to-peer protocols for your example.

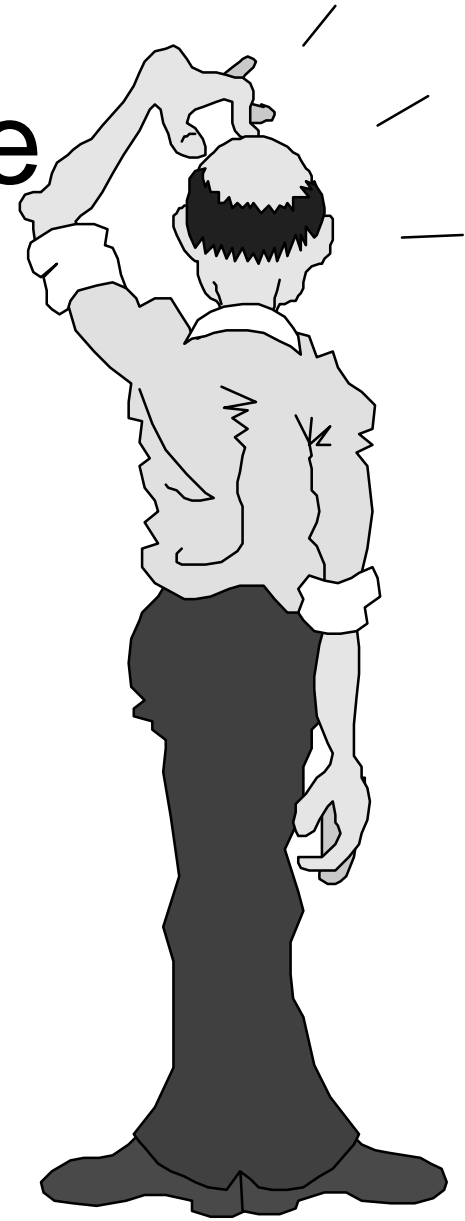

Programs & Processes

- A *program* is an executable file.
- A *process* or *task* is an instance of a program that is being executed.

Client - Server

- A *server* is a process - not a machine !
- A server waits for a request from a client.
- A client is a process that sends a request to an existing server and (usually) waits for a reply.

Client - Server Examples

- Server returns the time-of-day.
- Server returns a document.
- Server prints a file for client.
- Server does a disk read or write.
- Server records a transaction.

Servers

- Servers are generally more complex (more interesting).
- 2 Basic types of servers:
 - ◆ *Iterative* - server handles one client at a time.
 - ◆ *Concurrent* - server handles many clients at a time.
- We will study the differences later.