

CSCI-1200 Data Structures — Spring 2013

Lecture 9 — Iterators & Lists

Review from Lecture 8

- Explored a program to maintain a class enrollment list and an associated waiting list.
- Unfortunately, erasing items from the front or middle of vectors is inefficient.
- Iterators can be used to access elements of a vector

Today's Class

- Review of iterators and iterator operations
- STL lists, `erase` and `insert` on STL lists
- Differences between indices and iterators, differences between STL list and STL vector.
- Building *our own* basic linked lists:
 - Stepping through a list
 - Push back
 - ... & even more next week!

9.1 Review: Iterators and Iterator Operations

- An iterator type is defined by each STL container class. For example:

```
vector<double>::iterator v_itr;
list<string>::iterator l_itr;
string::iterator s_itr;
```

- An iterator is assigned to a specific location in a container. For example:

```
v_itr = vec.begin() + i; // i-th location in a vector
l_itr = lst.begin();    // first entry in a list
s_itr = str.begin();    // first char of a string
```

Note: We can add an integer to vector and string iterators, but not to list iterators.

- The contents of the specific entry referred to by an iterator are accessed using the ** dereference operator*. In the first and third lines, `*v_itr` and `*l_itr` are l-values. In the second, `*s_itr` is an r-value.

```
*v_itr = 3.14;
cout << *s_itr << endl;
*l_itr = "Hello";
```

- Stepping through a container, either forward and backward, is done using increment (`++`) and decrement (`--`) operators:

```
++itr;  itr++;  --itr;  itr--;
```

These operations move the iterator to the next and previous locations in the vector, list, or string. The operations do not change the contents of container!

- Finally, we can change the container that a specific iterator is attached to **as long as the types match**. Thus, if `v` and `w` are both `vector<double>`, then the code:

```
v_itr = v.begin();
*v_itr = 3.14; // changes 1st entry in v
v_itr = w.begin() + 2;
*v_itr = 2.78; // changes 3rd entry in w
```

works fine because `v_itr` is a `vector<double>::iterator`, but if `a` is a `vector<string>` then

```
v_itr = a.begin();
```

is a syntax error because of a type clash!

9.2 Additional Iterator Operations for Vector (& String) Iterators

- Initialization at a random spot in the vector:

```
v_itr = v.begin() + i;
```

Jumping around inside the vector through addition and subtraction of location counts:

```
v_itr = v_itr + 5;
```

moves p 5 locations further in the vector. These operations are constant time, $O(1)$ for vectors.

- These operations are *not allowed* for list iterators (and most other iterators, for that matter) because of the way the corresponding containers are built. These operations would be linear time, $O(n)$, for lists, where n is the number of slots jumped forward/backward. Thus, they are not provided by STL for lists.
- Students are often confused by the difference between iterators and indices for vectors. Consider the following declarations:

```
vector<double> a(10, 2.5);  
vector<double>::iterator p = a.begin() + 5;  
unsigned int i=5;
```

- Iterator p refers to location 5 in vector a . The value stored there is directly accessed through the $*$ operator:

```
*p = 6.0;  
cout << *p << endl;
```


- The above code has **changed the contents** of vector a . Here's the equivalent code using subscripting:

```
a[i] = 6.0;  
cout << a[i] << endl;
```


9.3 The list Standard Library Container Class

- Both lists & vectors store sequential data that can shrink or grow.
- However, the use of memory is fundamentally different. Vectors are formed as a single contiguous array-like block of memory. Lists are formed as a chain of separate memory blocks (not necessarily next to each other or in a particular order in memory), connected by pointers.

array/vector:



list:



- STL lists have no subscripting operation (we can't use $[]$ to access data). That is, they do not allow "random-access" or indexing. The only way to get to the middle of a list is to follow pointers one link at a time. Vectors do allow indexing (we can directly jump to the middle of the vector).
- STL lists have `push_front` and `pop_front` functions in addition to `push_back` and `pop_back`.
- `erase` and `insert` in the middle of the STL list is very efficient, independent of the size of the list. Both are implemented by rearranging pointers between the small blocks of memory.
- Note: We can't use the standard `sort` function; we must use a special `sort` member function defined by the STL list type:

```
std::vector<int> my_vec;  
std::list<int> my_lst;  
// ... put some data in my_vec & my_lst  
std::sort(my_vec.begin(), my_vec.end(), optional_compare_function);  
my_lst.sort(optional_compare_function);
```


Note: STL list `sort` member function is just as efficient, $O(n \log n)$, and will also take the same optional compare function as STL vector.

9.4 Erase & Iterators

- STL `lists` and `vectors` each have a special member function called `erase`. In particular, given list of ints `s`, consider the example:

```
list<int>::iterator p = s.begin();
++p;
list<int>::iterator q = s.erase(p);
```

- After the code above is executed:
 - The integer stored in the second entry of the list has been removed.
 - The size of the list has shrunk by one.
 - The iterator `p` does not refer to a valid entry.
 - The iterator `q` refers to the item that was the third entry and is now the second.

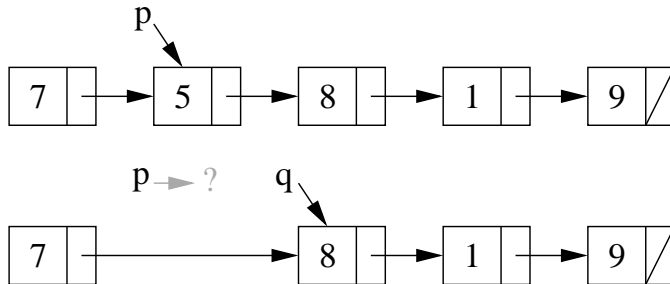

- To reuse the iterator `p` and make it a valid entry, you will often see the code written:

```
list<int>::iterator p = s.begin();
++p;
p = s.erase(p);
```

- Even though the `erase` function has the same syntax for `vectors` and for `list`, the `vector` version is $O(n)$, whereas the `list` version is $O(1)$.

9.5 Insert

- Similarly, there is an `insert` function for STL lists that takes an iterator and a value and adds a link in the chain with the new value immediately before the item pointed to by the iterator.
- The call returns an iterator that points to the newly added element. Variants on the basic `insert` function are also defined.

9.6 Exercise: Using STL list Erase & Insert

Write a function that takes an STL `list` of integers, `lst`, and an integer, `x`. The function should 1) remove all negative numbers from the list, 2) verify that the remaining elements in the list are sorted in increasing order, and 3) insert `x` into the list such that the order is maintained.

9.7 Working towards *our own* version of the STL list

- Our discussion of how the STL `list<T>` is implemented has been intuitive: it is a “chain” of objects.
- Now we will study the underlying mechanism — *linked lists*.
- This will allow us to build custom classes that mimic the STL `list` class, and add extensions and new features (more next week!).

9.8 Objects with Pointers, Linking Objects Together

- The two fundamental mechanisms of linked lists are:
 - creating objects with pointers as one of the member variables, and
 - making these pointers point to other objects of the same type.
- These mechanisms are illustrated in the following program:

```
#include <iostream>
using namespace std;


template <class T>
class Node {
public:
    T value;
    Node* ptr;
};

int main() {
    Node<int>* ll;      // ll is a pointer to a (non-existent) Node
    ll = new Node<int>; // Create a Node and assign its memory address to ll
    ll->value = 6;     // This is the same as (*ll).value = 6;
    ll->ptr = NULL;    // NULL == 0, which indicates a "null" pointer

    Node<int>* q = new Node<int>;
    q->value = 8;
    q->ptr = NULL;

    // set ll's ptr member variable to
    // point to the same thing as variable q
    ll->ptr = q;


    cout << "1st value: " << ll->value << "\n"
         << "2nd value: " << ll->ptr->value << endl;
}
```

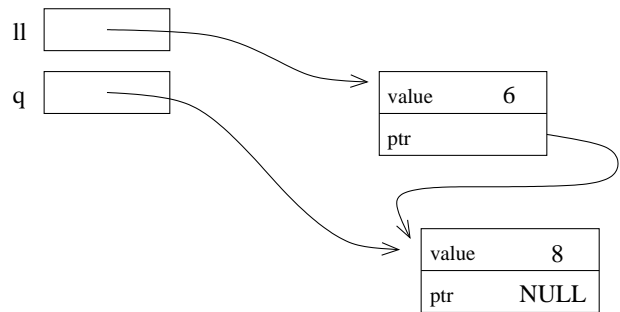

9.9 Definition: A Linked List

- The definition is recursive: A linked list is either:
 - Empty, or
 - Contains a node storing a value and a pointer to a linked list.
- The first node in the linked list is called the *head* node and the pointer to this node is called the *head* pointer. The pointer’s value will be stored in a variable called *head*.

9.10 Visualizing Linked Lists



- The **head** pointer variable is drawn with its own box. It is an individual variable. It is important to have a separate pointer to the first node, since the “first” node may change.
- The objects (nodes) that have been dynamically allocated and stored in the linked lists are shown as boxes, with arrows drawn to represent pointers.
 - Note that this is a conceptual view only. The memory locations could be anywhere, and the actual values of the memory addresses aren’t usually meaningful.
- The last node **MUST** have NULL for its pointer value — you will have all sorts of trouble if you don’t ensure this!
- You should make a habit of drawing pictures of linked lists to figure out how to do the operations.

9.11 Basic Mechanisms: Stepping Through the List

- We’d like to write a function to determine if a particular value, stored in **x**, is also in the list.
- We can access the entire contents of the list, one step at a time, by starting just from the **head** pointer.
 - We will need a separate, local pointer variable to point to nodes in the list as we access them.
 - We will need a loop to step through the linked list (using the pointer variable) and a check on each value.

9.12 Exercise: Write `is_there`

```
template <class T> bool is_there(Node<T>* head, const T& x) {
```

9.13 Basic Mechanisms: Pushing on the Back

- Goal: place a new node at the end of the list.
- We must step to the end of the linked list, remembering the pointer to the last node.
 - This is an $O(n)$ operation and is a major drawback to the ordinary linked-list data structure we are discussing now. We will correct this drawback by creating a slightly more complicated linking structure in our next lecture.
- We must create a new node and attach it to the end.
- We must remember to update the **head** pointer variable’s value if the linked list is initially empty.
 - Hence, in writing the function, we must pass the pointer variable **by reference**.

9.14 Exercise: Write `push_back`

```
template <class T> void push_back( Node<T>* & head, T const& value ) {
```